

# Proper balance between search towards and along Pareto front: biobjective TSP case study

## Additional results

Andrzej Jaszekiewicz

*Poznan University of Technology, Faculty of Computing, Institute of Computing Science,  
ul. Piotrowo 2, 60-965 Poznan, Poland  
andrzej.jaszekiewicz@put.poznan.pl*

Thibaut Lust

*Sorbonne Universités, UPMC Universités Paris 06  
CNRS, LIP6, UMR 7606, F-75005, Paris, France  
thibaut.lust@lip6.fr*

---

---

### 1. Additional results

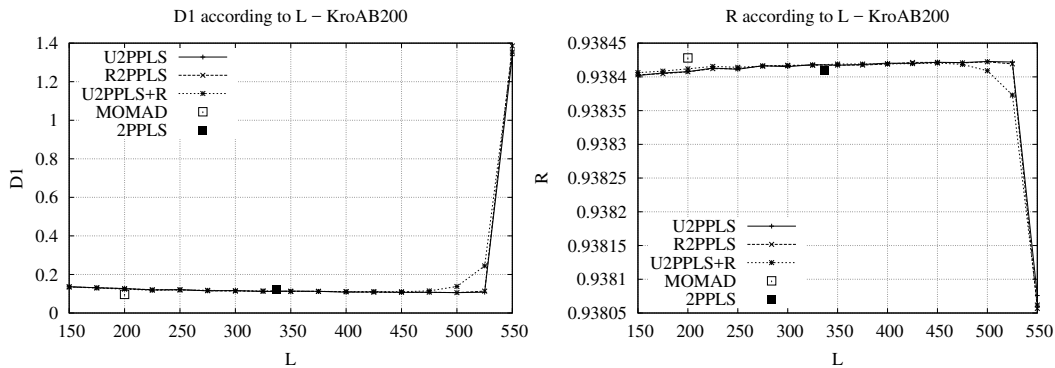


Figure 1: KroAB200

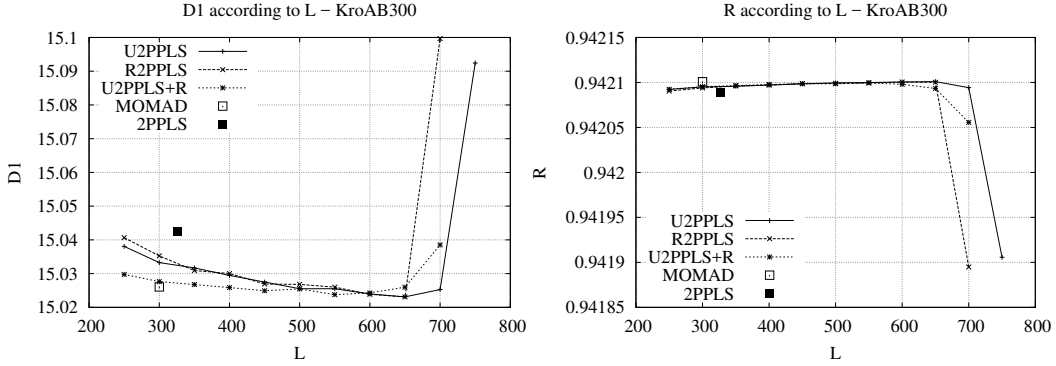


Figure 2: KroAB300

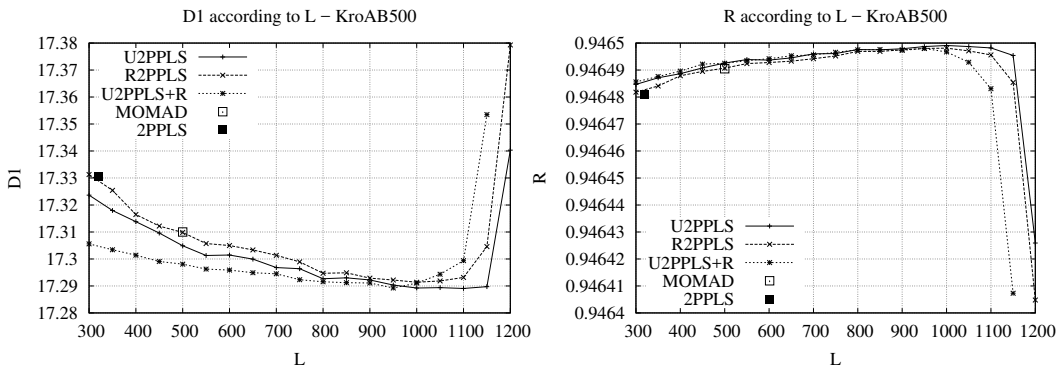


Figure 3: KroAB500

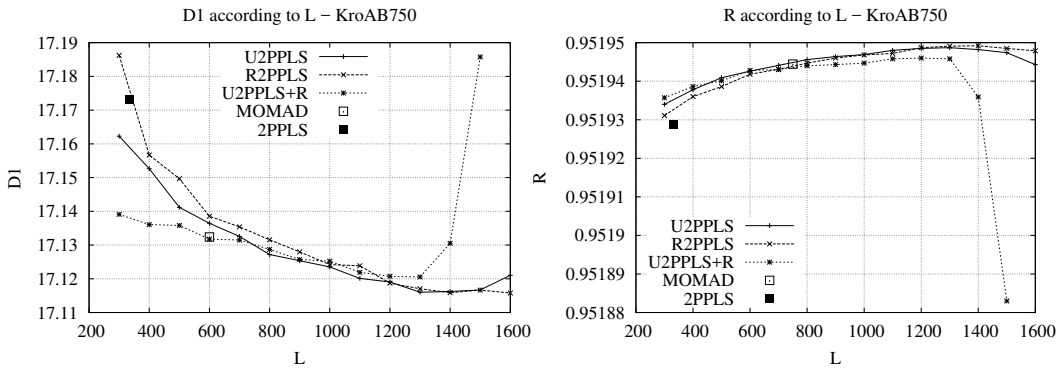


Figure 4: KroAB750

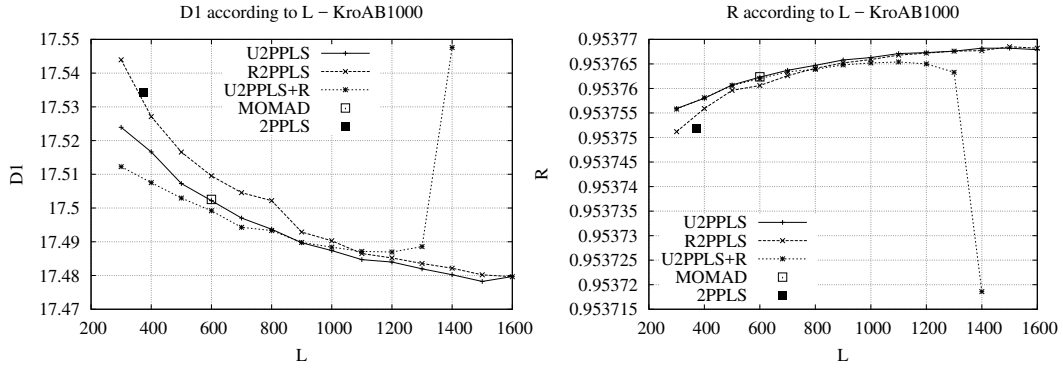


Figure 5: KroAB1000

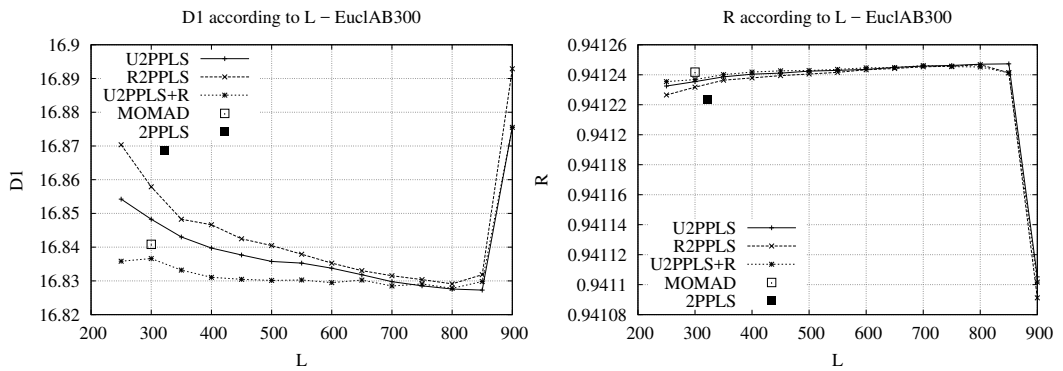


Figure 6: EuclAB300

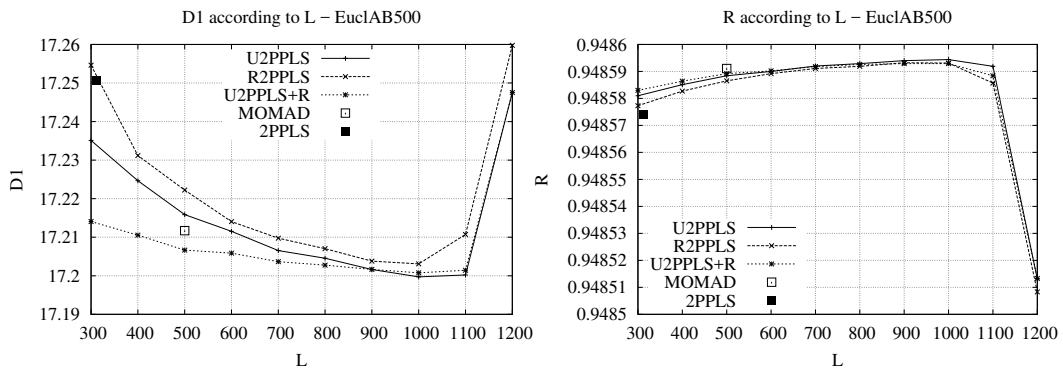


Figure 7: EuclAB500

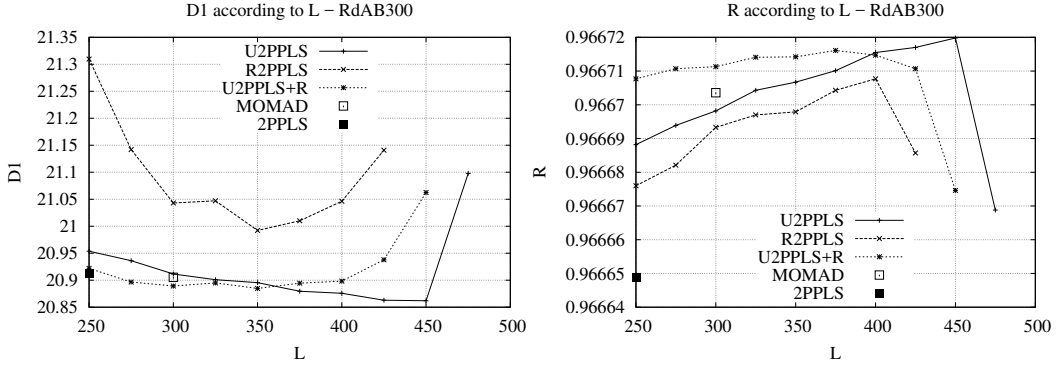


Figure 8: RdAB300

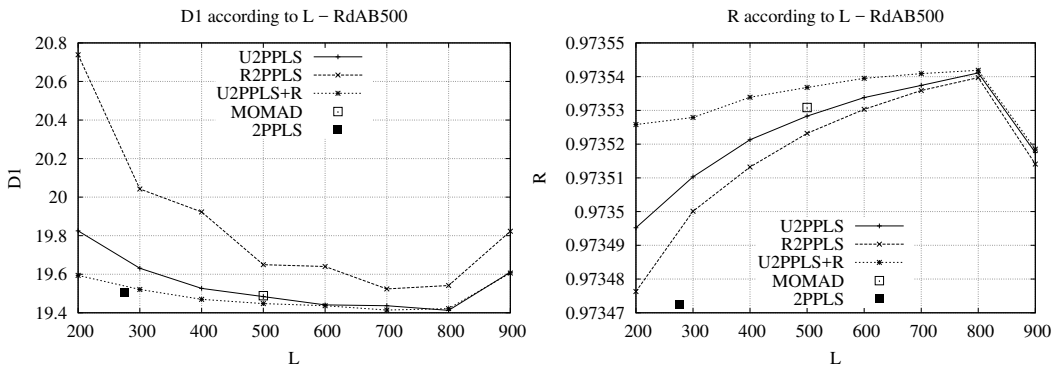


Figure 9: RdAB500

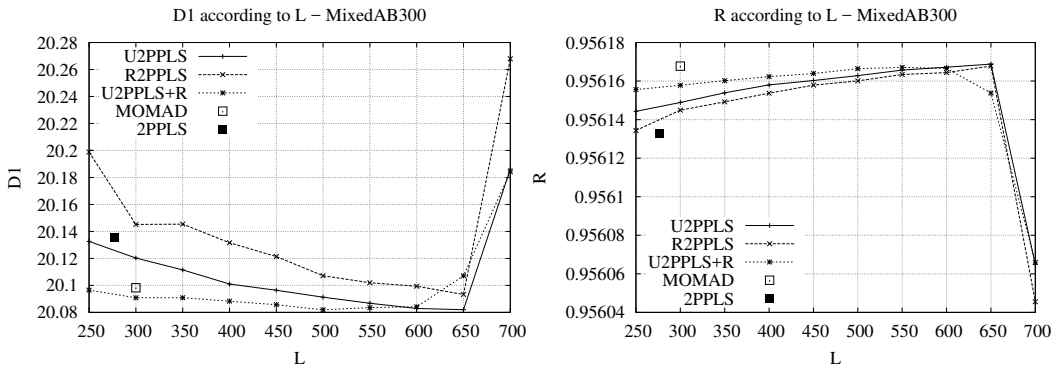


Figure 10: MixedAB300

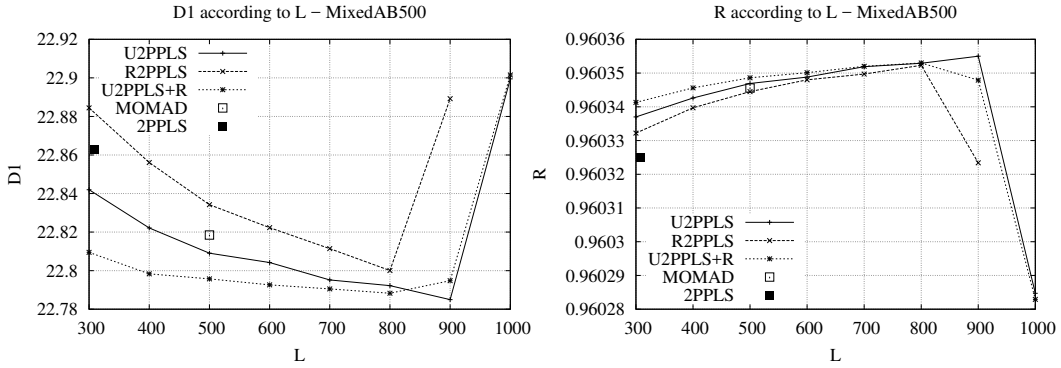


Figure 11: MixedAB500

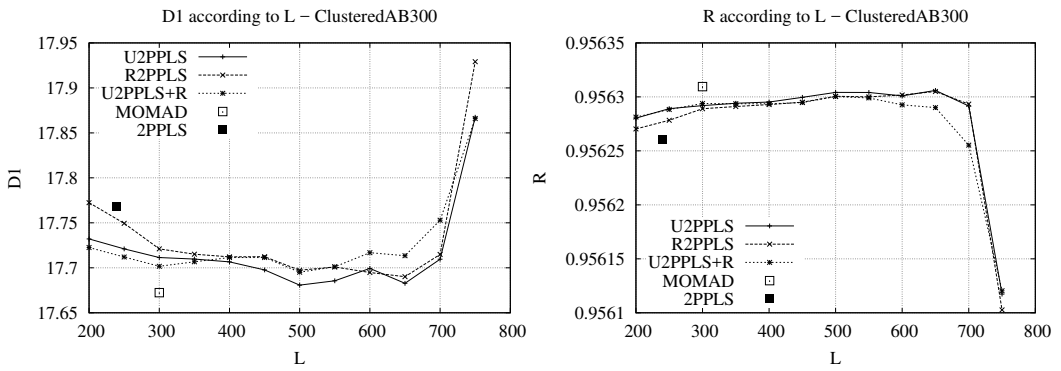


Figure 12: ClusteredAB300

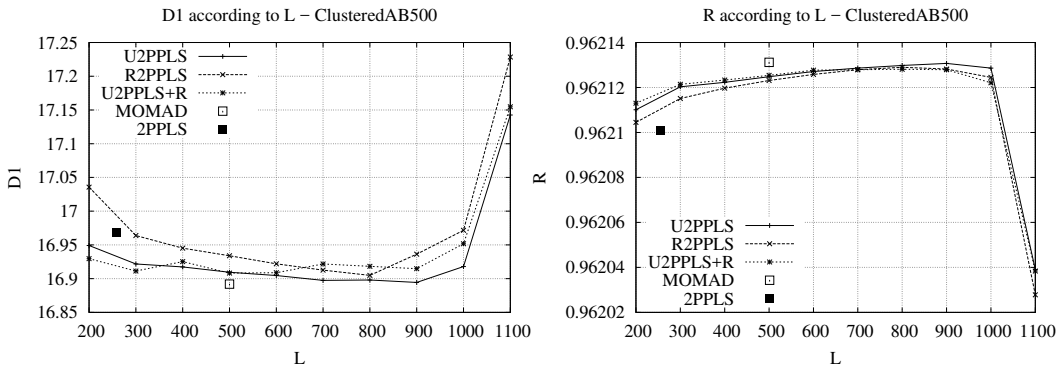


Figure 13: ClusteredAB500

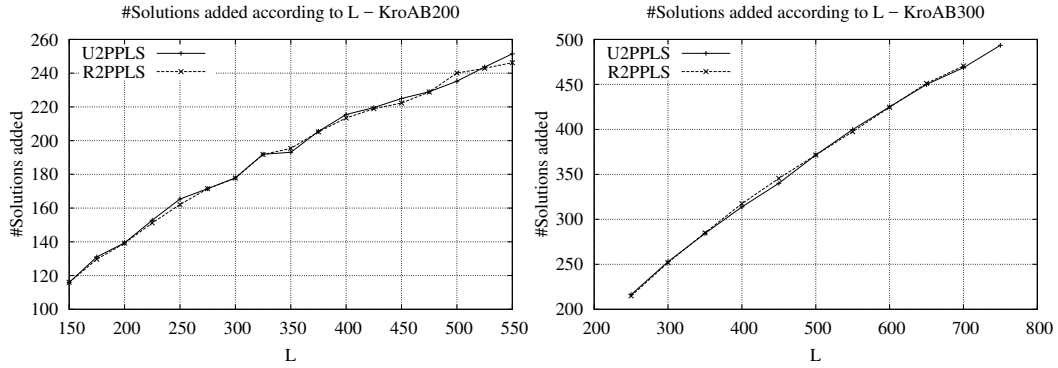


Figure 14: KroAB200 - KroAB300

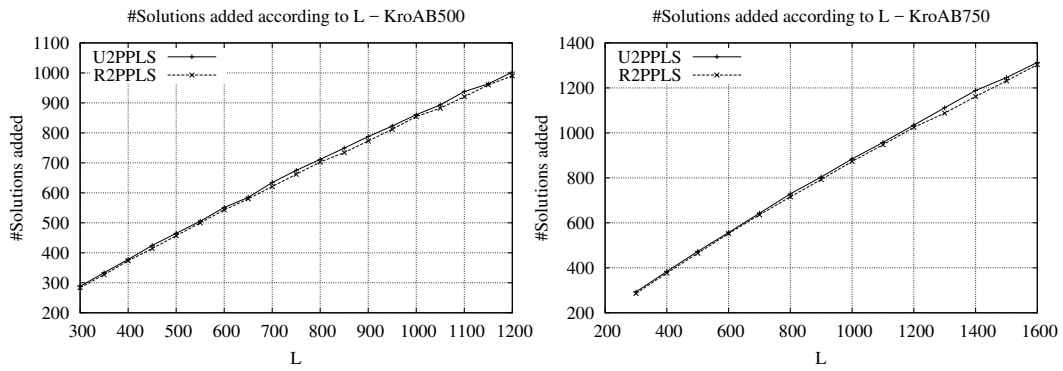


Figure 15: KroAB500 - KroAB750

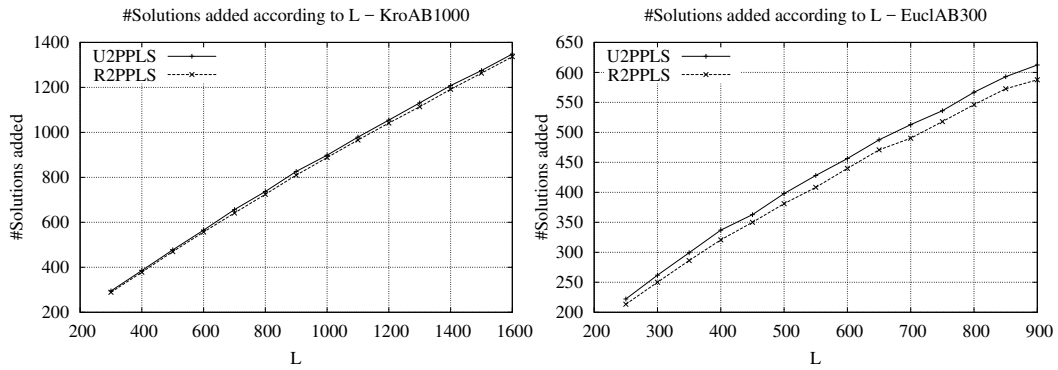


Figure 16: KroAB1000 - EuLAB300

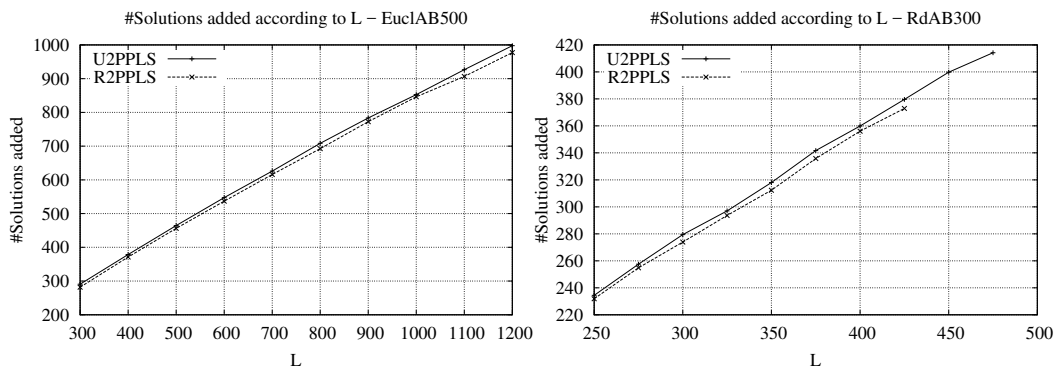


Figure 17: EuclAB500 - RdAB300

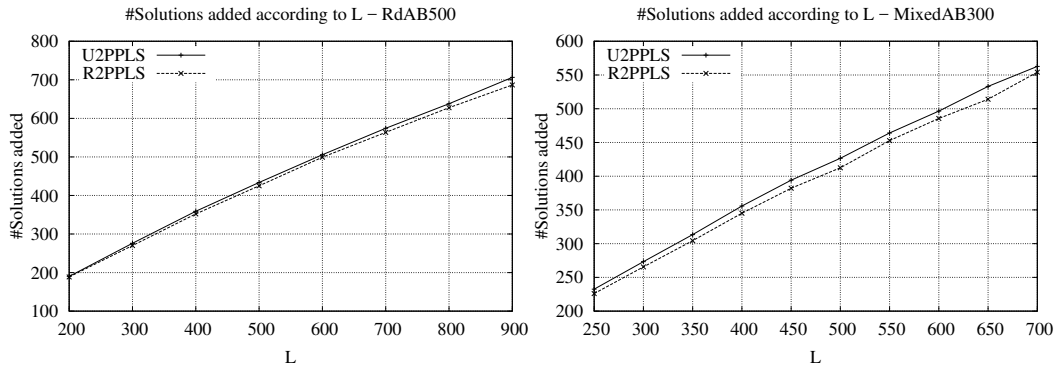


Figure 18: RdAB500 - MixedAB300

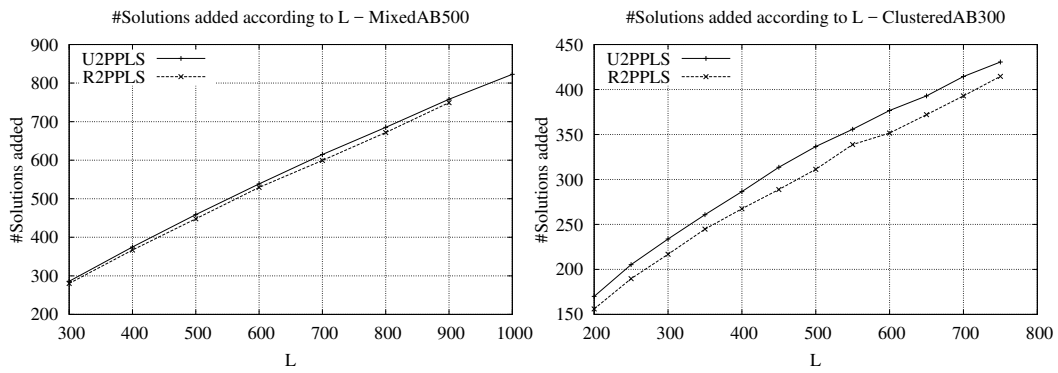


Figure 19: MixedAB500 - ClusteredAB300



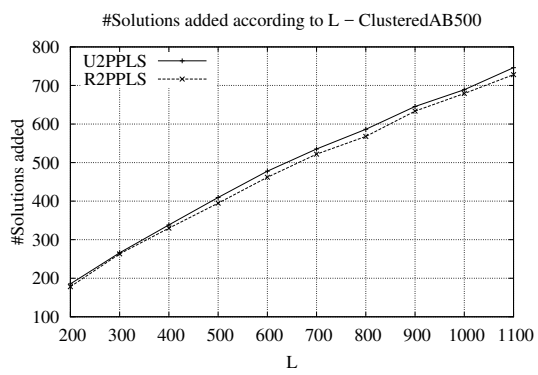


Figure 20: ClusteredAB500